



KOMPACT Dehumidifier

KEY DESIGN FEATURES

- Washable Air filter for easy maintenance
- Rugged wheels with shock absorbing semi-pneumatic tires
- Collapsible Handle for easy transport
- Integral condensate pump capable of 20' vertical lift
- Hours Run Meter providing accurate run time measurements
- High efficiency rotary compressor.
- Extra long power cord (16')
- Extra long drain hose (25')
- EIPL's unique "Hot Gas" defrosting feature which automatically melts away frost buildup providing effective operation at low ambient temperatures.
- Rugged, epoxy powder-coated steel chassis and housing.
- Simplicity of installation and operation with a standard 115V plug.




HIGH CAPACITY • COMPACT • LOW TEMPERATURE • INDUSTRIAL INSTITUTIONS • RENTALS

SPECIFICATIONS

| SPECIFICATIONS | KOMPACT 11240KP-US | FEATURES | KOMPACT 11240KP-US |
|-------------------------------|------------------------|--------------------------------------|-----------------------|
| Height | 24" (610mm) | On / Off Control | ✓ |
| Width | 20" (508mm) | Electronic Defrost Control | ✓ |
| Depth | 19" (483mm) | Compressor Type | Rotary |
| Weight | 78 lbs (35kg) | Fitted Mains Plug | ✓ |
| Voltage V / P / Hz | 110 / 1 / 60 | Semi-Pneumatic Shock Absorbing Tyres | ✓ |
| Current | 7 A | Integral Condensate Pump | ✓ |
| Power | 880W | Pump Purge Switch | ✓ |
| Airflow | 360cfm (608m3/hr) | Hours Run Meter | ✓ |
| Noise Level | 57 dba | Hot Gas Defrost System | ✓ |
| Refrigerant | R454c | Washable Air Filter | ✓ |
| Effective Volume | 8,369 cu.ft (237m3) | Quick Release Hose Coupling | ✓ |
| Typical Extraction | 56 ppd | Collapsible Carrying Handles | ✓ |
| Minimum Operating Temperature | 33°F (1°C) | Cable Wrap Facility | ✓ |
| Maximum Operating Temperature | 95°F (35°C) | Quiet Operation | ✓ |
| | | 25' Length of PVC Drain Hose | ✓ |
| | | Epoxy Powder Coating | ✓ |

HOW A DEHUMIDIFIER WORKS

1. Air is drawn into the unit by a fan
2. Air passes over a cold surface
3. As the air is cooled, it's moisture condenses
4. Water falls into the container
5. Air is re-heated by the heat recovery system
6. Air passes back into room 2°C warmer and considerably dryer
7. Defrost system automatically de-ices unit as necessary
8. Unit switches off automatically when container is full
9. When the unit achieves the selected level of dryness it switches off automatically

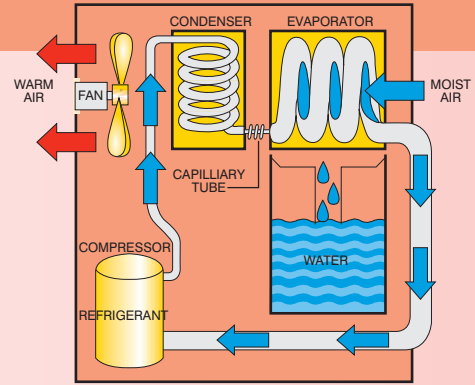

APPLICATION

The EIPL KOMPACT Professional Dehumidifier is the ideal unit for commercial work. Its compact size permits one-man operation, yet it has the capacity to handle several room-size areas at a time.

Best of all, it's affordably priced within the budget of most restoration specialists.

| APPLICATIONS | KOMPACT |
|---------------------|---------|
| Flood & Restoration | ✓ |
| Roof Leaks | ✓ |
| Basements / Cellars | ✓ |
| Laundries | ✓ |
| Vehicle Storage | ✓ |
| Hotels | ✓ |
| Laboratories | ✓ |
| Offices | ✓ |

PROVEN PERFORMANCE

The EIPL KOMPACT Professional Dehumidifier is a rugged, yet mobile piece of equipment that will operate under extreme conditions and pull large amounts of moisture from the air. Whenever there is a need for fast dependable, energy-efficient drying, EIPL can provide the answer. The high efficiency Rotary compressor ensures the maximum extraction with the lowest running costs.

THE DEHUMIDIFIER

EIPL dehumidifiers are effective solutions to environmental control problems. The KOMPACT range are high capacity dehumidifiers, made to operate at high efficiencies by removing moisture from the air through the refrigeration process. The fan draws the moist air through the cold evaporator coil, which cools the air below its dew point. Moisture forms on the evaporator coil and is collected in the condensate tray. The cooled air then passes through the hot condenser coil where it is reheated using the same energy removed during the cooling phase, plus the additional heat generated by the compressor. The air is, therefore, discharged from the dehumidifier at a slightly higher temperature with a lower absolute humidity than that which entered.

THE PROBLEM

EIPL is a recognized world wide supplier of flood restoration drying equipment. We offer a variety of dehumidifiers and air movers to remove water and assist with drying areas after water damage. Following a flood, whether it is in your basement or office, it's vitally important to restore the damaged area to good order as soon as possible to protect your health from microorganisms, mold and bacteria that may grow and ultimately prevent further damage. Whether it is a flash flood, hurricane, heavy rains or water main break, EIPL has the equipment to handle the harshest environments and assist with proper restoration.

Continuous circulation of air through the dehumidifier gradually reduces the relative humidity within the area. Because the KOMPACT unit is equipped with an internal condensate pump, the equipment is ideal for unmanned situations, removing the need to empty buckets / containers. The neat pump purge facility, allows the condensate pump to be drained before moving to another location, and prevents water spillage during transport.

The small, compact size of the KOMPACT allows the unit to be easily moved and transported from job to job.



Ebac Industrial Products, Inc. (Virginia) +01 757 873 6800
700 Thimble Shoals Blvd, Suite 109, Newport News, Virginia. 23606-2575

Ebac Industrial Products, Inc. (California) +01 951 777 9914
West Coast Sales and Distribution Center, 2060 Chicago Ave, Suite C7, Riverside, California. 92507

sales@ebacusa.com www.ebacusa.com